

Milwaukee®



**EQUIPMENT
SYSTEM**



2023
SYSTEM RANGE

20

LEADING THE CHARGE

Building on the strengths of FUEL™ technology, MX FUEL™ system reaches new levels of cordless performance. Focused on matching petrol, corded and pneumatic equipment, MILWAUKEE® delivers the performance the professional user expects, while eliminating the hazards associated with emissions, noise, vibrations and tool maintenance.



23

The world's first 350 mm battery powered cut-off saw to deliver the power to cut reinforced concrete.

DECIBEL (DB) REDUCTIONS

NO RISK OF SPILLING FUEL

SAVE MORE THAN €1800 PER YEAR



ZERO EMISSIONS.* ZERO COMPROMISE.



PETROL EQUIVALENT PERFORMANCE



LOW NOISE



NO PETROL OR EMISSIONS



LESS DOWNTIME



ENHANCE JOBSITE SAFETY



INCREASED PRODUCTIVITY

THE EU AIMS TO BE CLIMATE-NEUTRAL BY 2050**



ENSURING OUR USERS CAN WORK SAFELY, SUSTAINABLY, AND PRODUCTIVELY.

NO LOSS OF POWER. NO LOSS OF PRODUCTIVITY. BETTER FOR YOUR PEOPLE. BETTER FOR OUR PLANET.

*Zero emissions when product in use

With zero emissions, there are no limitations on where work can be carried out. Indoors, underground, or in remote areas with no available power sources, MILWAUKEE®'s battery-power removes the traditional jobsite boundaries and opens up new opportunities for work.



UNRIVALLED TECHNOLOGY*

1 REDLITHIUM™ BATTERY PACK

Industry leader in lithium-ion technology

Patented design protects against drops, water and harsh environments

Robust electronics optimise performance for every equipment and battery combination



2 REDLINK PLUS™ INTELLIGENCE

Most advanced system of equipment electronics in the industry

Protects equipment with one of its kind thermal and overload monitoring

Delivers in-application communication, optimising equipment performance



3 POWERSTATE™ BRUSHLESS MOTOR

Engineered uniquely for the demands of each piece of equipment


Optimised for the perfect combination of performance, portability and productivity

Built with maximum magnet content and top-grade rare earth magnets for optimising equipment performance



REDLITHIUM™ BATTERY PACKS AND CHARGERS

WORLD LEADER IN LITHIUM BATTERY INNOVATION

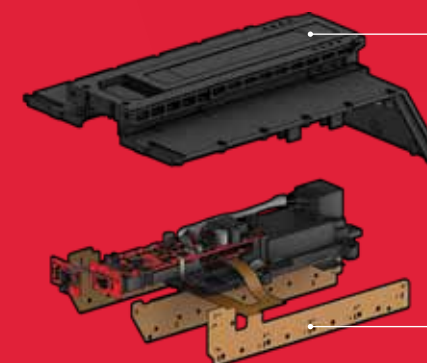


SUPERIOR PACK CONSTRUCTION

Triple pack construction impact resistant housing, up to two subcores and up to 5x more rubber overmould to protect against drops, vibration, water, and extreme temperatures. This significantly improves durability in the most demanding equipment applications.




ADVANCED ELECTRONICS

REDLINK™ intelligence provides industry-leading communication between the battery, equipment and chargers ensuring optimum equipment performance during the entire discharge, and battery life.

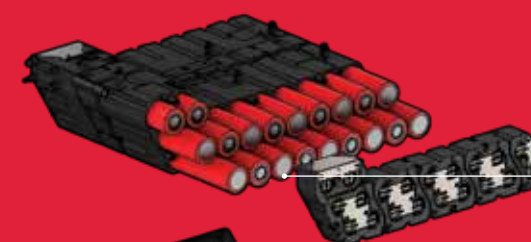

WORLD LEADING CELL TECHNOLOGY

MX FUEL™ REDLITHIUM™ batteries leverage the best-performing and highest-quality lithium-ion technology, developed through deep partnerships with world leaders in cell design. MILWAUKEE® ensures optimum performance and life for the most demanding equipment applications through rigorous in-house testing in Milwaukee Tool's own world-class battery laboratory.

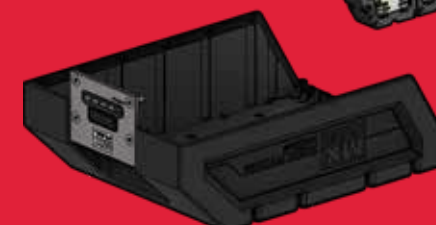



MXF PS

MX FUEL™ POWER SUPPLY



REDLITHIUM™

THE BEST TEMPORARY POWER
FOR THE JOB

PORTABLE POWER
ANYWHERE

MORE EFFICIENT
POWER

FEATURES

- ✓ Building on the strengths of the FUEL™ technology, MX FUEL™ system reaches new levels of cordless performance. Focused on petrol, corded and pneumatic performance, these tools deliver without the hazards associated with emissions, noise, vibration, tripping hazards and the frustrations of complex maintenance
- ✓ Provides 3,600 peak watts and 1,800 continuous watts output of pure sine inverter energy, powering everything from high demand 16A tools to sensitive electronics
- ✓ No emissions and quiet operation allow users to use it safely indoors
- ✓ Battery powered generator eliminates the cost of petrol, maintenance, reducing downtime and increasing jobsite productivity
- ✓ Built-in charger gives users the freedom to charge any MX FUEL™ batteries in the AC mode
- ✓ ONE-KEY™ tool tracking & security offers a free of charge cloud-based tracking network and inventory management platform for your tools. ONE-KEY™ also features a remote locking functionality
- ✓ Robust roll cage design provides durability for outdoor jobsite use
- ✓ Operates with one, or two batteries for extended run time
- ✓ Product should not be used in bad weather conditions

SPECIFICATIONS

MXF PS-602	
Running power (W)	1,800
Weight with battery (EPTA) (kg)	28.2 (2 x MXF XC406)
Includes	2 x MXF XC406 batteries, built-in charger, no kitbox
Article number	4933479266



MX FUEL™ BATTERIES

- ✓ MX FUEL™ REDLITHIUM™ batteries leverage the best-performing and highest-quality lithium-ion technology
- ✓ Delivering AC power in a compact and portable battery pack, allowing users to work in areas where power cords will struggle to reach
- ✓ MX FUEL™ REDLITHIUM™ batteries utilise unique design to protect against drops, vibration, water, and extreme temperatures
- ✓ Operates down to -28.0° temperature
- ✓ Most advanced electronic power management system communicates with the tool in order to deliver full power in balance with maximum durability
- ✓ ONE-KEY™ tool tracking & security offers a free of charge cloud-based tracking network and inventory management platform for your tools. ONE-KEY™ also features a remote locking functionality
- ✓ Enables the user to run tools in confined spaces as well as indoors or in trenches
- ✓ Offering a new solution in comparison to petrol

	NEW	NEW				
	MXF HD812	MXF XC-608	MXF XC406	MXF XC-2406	MXF CP203	MXF CP-2203
System	MX FUEL™	MX FUEL™	MX FUEL™	MX FUEL™	MX FUEL™	MX FUEL™
Capacity (Ah)	12.0	8.0	6.0	6.0	3.0	3.0
Number of batteries	1	1	1	2	1	2
Charge duration MXF C	180 min	105 min	90 min	90 min	45 min	45 min
Charge duration MXF SC	65 min	45 min	45 min	45 min	45 min	45 min
Weight (kg)	5.9	4.5	4.8	4.8	2.7	2.7
Supplied in	No kitbox	No kitbox	No kitbox	No kitbox	No kitbox	No kitbox
Article number	4932492128	4932492130	4933471837	4933479162	4933471838	4933479161

REDLITHIUM™

MX FUEL™ BATTERIES

- ✓ Charges all MX FUEL™ batteries
- ✓ Increases productivity at the jobsite
- ✓ REDLINK™ intelligence optimise the charge rate for each battery to minimise charge time
- ✓ On-board carry handle
- ✓ LED Light indicates 80% state of charge

	NEW	
	MXF SC	MXF C
Charging ports	1 x MX FUEL™	1 x MX FUEL™
Charge type	Single	Single
Power source	AC	AC
Carry handle	Yes	Yes
Wall mountable	No	Yes
Weight (kg)	8.9	2.7
Supplied in	Supplied without a box	Supplied without a box
Article number	4932492848	4933471839

MX FUEL™ BATTERY AND CHARGER KITS



	NEW	NEW	
	MXF NRG-406	MXF NRG-802	MXF NRG-122
System	MX FUEL™	MX FUEL™	MX FUEL™
Includes	2 x MXF XC406 batteries, MXF C charger, no kitbox	2 x MXF XC608 batteries, MXF SC charger, no kitbox	2 x MXF HD812 batteries, MXF SC charger, no kitbox
Article number	4933479160	4933493548	4933493549

REDLITHIUM™



MXF CVBP

MX FUEL™ BACKPACK CONCRETE VIBRATOR



FEATURES

- ✓ The MX FUEL™ Backpack Concrete Vibrator is the ideal solution when working on larger areas, delivering AC like performance without the hassle of laying cables or having the need for a AC socket on the jobsite
- ✓ It has the power to push up to ø63 mm head at over 11,200 VPM for optimal consolidation, even in the stiffest concrete
- ✓ The push-button start delivers instant power, eliminating the repetitive motions of a pull start and reducing downtime, allowing you to get jobs done faster without sacrificing the power and run time you expect
- ✓ The modular design makes it easy to remove the backpack harness for walls and columns
- ✓ Modular design - with just one click from backpack to briefcase
- ✓ It can accept shafts up to 6.4 m long and heads up to ø63 mm without sacrificing power
- ✓ Consolidates up to 40 m³ of concrete on 1x MXF XC406 battery
- ✓ The wireless remote gives you the ability to turn the machine on from up to 9 m away for more freedom when using long shafts
- ✓ System attachments, heads and shafts are available separately
- ✓ Building on the strengths of the FUEL™ technology, MX FUEL™ system reaches new levels of cordless performance. Focused on petrol, corded and pneumatic performance, these tools deliver without the hazards associated with emissions, noise, vibration, tripping hazards and the frustrations of complex maintenance
- ✓ ONE-KEY™ tool tracking & security offers a free of charge cloud-based tracking network and inventory management platform for your tools. ONE-KEY™ also features a remote locking functionality. Customisation function allows for precise tool adjustment to application
- ✓ Supplied with remote control



SPECIFICATIONS

	MXF CVBP-0	MXF CVBP-602	MXF CVBPKIT-602
Vibrations (1/min)	11,200	11,200	11,200
Columns	✓	✓	✓
Footings	✓✓	✓✓	✓✓
Slabs	✓✓✓	✓✓✓	✓✓✓
Walls	✓	✓	✓
Weight with battery (EPTA) (kg)	15.7 (MXF XC406)	15.7 (MXF XC406)	15.7 (MXF XC406)
Supplied with	Remote control	Remote control	Remote control, 2 m vibrator shaft, 38 mm vibrator head
Includes	No batteries, no charger, no kitbox	2 x MXF XC406 batteries, MXF C charger, no kitbox	2 x MXF XC406 batteries, MXF C charger, no kitbox
Article number	4933479595	4933479591	4933479593



MXF CVBC

MX FUEL™ CONCRETE VIBRATOR



FEATURES

- ✓ Compact and slim design for increased mobility suiting stationary as well as mobile applications
- ✓ Carrying strap and handle for increased flexibility on site and easy transport
- ✓ Equipped with a ring for easy attachment of the vibrator to the scaffolding or the formwork
- ✓ The MX FUEL™ Briefcase Concrete Vibrator is the ideal solution when working on walls and columns, delivering AC like performance without the hassle of laying cables or having the need for an AC socket on the jobsite
- ✓ It has the power to push up to ø63 mm head at over 11,200 VPM for optimal consolidation, even in the stiffest concrete
- ✓ The push-button start delivers instant power, eliminating the repetitive motions of a pull start and reducing downtime, allowing you to get jobs done faster without sacrificing the power and run time you expect
- ✓ It can accept shafts up to 6.4 m long and heads up to ø63 mm without sacrificing power
- ✓ Consolidates up to 40 m³ of concrete on 1x MXF XC406 battery
- ✓ The wireless remote gives you the ability to turn the machine on from up to 9 m away for more freedom when using long shafts
- ✓ System attachments, heads and shafts are available separately
- ✓ Building on the strengths of the FUEL™ technology, MX FUEL™ system reaches new levels of cordless performance. Focused on petrol, corded and pneumatic performance, these tools deliver without the hazards associated with emissions, noise, vibration, tripping hazards and the frustrations of complex maintenance
- ✓ ONE-KEY™ tool tracking & security offers a free of charge cloud-based tracking network and inventory management platform for your tools



SPECIFICATIONS

	MXF CVBC-0	MXF CVBC-602	MXF CVBCKIT-602
Vibrations (1/min)	11,200	11,200	11,200
Columns	✓✓✓	✓✓✓	✓✓✓
Footings	✓✓	✓✓	✓✓
Slabs	✓	✓	✓
Walls	✓✓✓	✓✓✓	✓✓✓
Weight with battery (EPTA) (kg)	10.3 (MXF XC406)	10.3 (MXF XC406)	10.3 (MXF XC406)
Supplied with	Remote control	Remote control	Remote control, 4 m vibrator shaft, 38 mm vibrator head
Includes	No batteries, no charger, no kitbox	2 x MXF XC406 batteries, MXF C charger, no kitbox	2 x MXF XC406 batteries, MXF C charger, no kitbox
Article number	4933479607	4933479608	4933479610



BUILD YOUR KIT

MXF CVBP-602

MX FUEL™ BACKPACK CONCRETE VIBRATOR

Article number 4933479591



OR

MXF CVBC-602

MX FUEL™ CONCRETE VIBRATOR

Article number 4933479608



CHOOSE VIBRATOR SHAFT



CHOOSE VIBRATOR HEAD

	Slabs MXF CVBP	Slabs MXF CVBC	Footings MXF CVBP	Footings MXF CVBC	Columns MXF CVBP	Columns MXF CVBC	Walls MXF CVBP	Walls MXF CVBC	Article number	
MXF CVS-2 m	✓✓✓	✓	✓✓✓	✓	✗	✗	✗	✗	4932478611	
MXF CVS-3 m	✓✓✓	✓	✓✓✓	✓	✓	✓	✓	✓	4932479612	
MXF CVS-4 m	✓	✓✓	✓	✓✓	✓✓✓	✓✓✓	✓✓✓	✓✓✓	4932478610	
MXF CVS-6.4 m	✗	✓✓✓	✗	✓✓✓	✗	✓✓✓	✗	✓✓✓	4932479613	

	Ø (mm)	Article number	
Vibrator heads	25	4932479839	
	38	4932478612	
	50	4932478613	
	63	4932479840	

MXF PSC

MX FUEL™ SCREED



FEATURES

- ✓ The MX FUEL™ Screed is the ideal solution when working on larger areas, delivering petrol like performance without petrol headaches
- ✓ Power to pull blades up to 4.9 m
- ✓ The push-button start delivers instant power, eliminating the repetitive motions of a pull start and reducing downtime, allowing you to get jobs done faster without sacrificing the power and run time you expect
- ✓ The POWERSTATE® brushless motor delivers the power to pull 4.9 m bar at 9,000 VPM with a variable speed trigger, giving you maximum control in stiff and wet concrete
- ✓ Foldable handles for easy transport on site and in concrete
- ✓ Easy quick connect system of the blade with two bolts
- ✓ Up to 2 hrs of run time per charge with the 3.65 m blade and the MXF CP203 battery
- ✓ System attachments, blades are available separately
- ✓ Building on the strengths of the FUEL™ technology, MX FUEL™ system reaches new levels of cordless performance. Focused on petrol, corded and pneumatic performance, these tools deliver without the hazards associated with emissions, noise, vibration, tripping hazards and the frustrations of complex maintenance
- ✓ ONE-KEY™ tool tracking & security offers a free of charge cloud-based tracking network and inventory management platform for your tools. ONE-KEY™ also features a remote locking functionality
- ✓ Supplied with a 9/16" wrench



POWER TO PULL
4,9 M BLADE

NO GAS HEADACHES

2 HOURS PER CHARGE
W/ 3,65 M BLADE

SPECIFICATION

	MXF PSC-0	MXF PSC-302	MXF PSCKIT-302
Vibrations (1/min)	9,000	9,000	9,000
Weight with battery (EPTA) (kg)	16.8 (MXF CP203)	16.8 (MXF CP203)	16.8 (MXF CP203)
Standard equipment	-	-	3 m blade
Includes	No batteries, no charger, no kitbox	2 x MXF CP203 batteries, MXF C charger, no kitbox	2 x MXF CP203 batteries, MXF C charger, no kitbox
Article number	4933479771	4933479772	4933479774

REDLITHIUM™

BLADES FOR MX FUEL™ SCREED (MXF PSC)

	Length (m)	Weight (kg)	Article number
MXF PSB-1.22 m	1.22	3.6	4932479776
MXF PSB-1.83 m	1.83	5.5	4932479777
MXF PSB-2.44 m	2.44	7.3	4932479778
MXF PSB-3.00 m	3.00	9.1	4932479779
MXF PSB-3.65 m	3.65	10.9	4932479780
MXF PSB-4.25 m	4.25	12.8	4932479781
MXF PSB-4.87 m	4.87	14.6	4932479782

MXF DCD350

MX FUEL™ 350 MM DIAMOND CORE DRILL



COMING
SOON

FEATURES

- ✓ Power to core 350 mm holes in reinforced concrete
- ✓ Easiest coring anywhere
- ✓ Rig-mounted diamond coring up to 350 mm diameter. Core with confidence by delivering AC performance
- ✓ 4 speed gearing for a wide range of applications, with laser etched speed and capacity markings into the metal body
- ✓ Tool-free quick lock connection
- ✓ Speed 1: up to 51 mm / Speed 2: 51 - 76 mm / Speed 3: 76 - 152 mm / Speed 4: 152 - 350 mm
- ✓ On-board pressure gauge allows user to optimise drilling speed in order to get the best lifetime of machine and accessory
- ✓ On-board battery gauge allows the user to monitor battery capacity during entire drilling process
- ✓ 1 1/4" UNC + 1/2" G core fitting to fit most common cores, with friction plate design allowing for easy core changes
- ✓ Tool-free quick lock connection of the core drill to the drill stand
- ✓ Can be used with optional vacuum pump on smooth and even surfaces
- ✓ Building on the strengths of the FUEL™ technology, MX FUEL™ system reaches new levels of cordless performance. Focused on petrol, corded and pneumatic performance, these tools deliver without the hazards associated with emissions, noise, vibration, tripping hazards and the frustrations of complex maintenance
- ✓ ONE-KEY™ tool tracking & security offers a free of charge cloud-based tracking network and inventory management platform for your tools. ONE-KEY™ also features a remote locking functionality



POWER TO CORE
350 MM HOLES IN
REINFORCED CONCRETE

EASIEST CORING
ANYWHERE

TOOL-FREE QUICK
LOCK CONNECTION

SPECIFICATION

	MXF DCD350 DD-0	MXF DCD350 KIT-0	MXF DCD350 KIT-122
Max. drilling concrete (mm)	350	350	350
No load speed (rpm)	0 - 390/ 0 - 850/ 0 - 1650/ 0 - 2200	0 - 390/ 0 - 850/ 0 - 1650/ 0 - 2200	0 - 390/ 0 - 850/ 0 - 1650/ 0 - 2200
Tool reception	1 1/4" UNC + 1/2" G	1 1/4" UNC + 1/2" G	1 1/4" UNC + 1/2" G
Weight with battery (EPTA) (kg)	27.6 (MXF HD812)	27.6 (MXF HD812)	27.6 (MXF HD812)
Standard equipment	-	MXF DCD350 DR stand	MXF DCD350 stand
Includes	No batteries, no charger, no kitbox	No batteries, no charger, no kitbox	2 x MXF HD812 batteries, MXF SC charger, no kitbox
Article number	4933493146	4933493142	4933493143

REDLITHIUM™

MXF DCD350 VP

MX FUEL™ VACUUM PLATE

- Article number 4932493147
- ✓ Vacuum plate with pressure gauge
 - ✓ Tool-free attachment to MXF DCD350 MX FUEL™ 350 mm diamond core drill
 - ✓ Coring up to ø300 mm with vacuum recommended vacuum pump (4932352094)

MXF DCD350-150 AP

MX FUEL™ VACUUM PLATE

Article number 4932493148

- ✓ Tool-free attachment to MXF DCD350 MX FUEL™ 350 mm diamond core drill
- ✓ Vacuum plate with pressure gauge
- ✓ Coring up to ø300 mm with vacuum recommended vacuum pump (4932352094)

NEW



NEW



WET DIAMOND DRILLING CORES WCHP & WCHP-SB ABOVE 52 MM

- ✓ Standard 1 1/4" UNC reception
- ✓ Engraving of diameter and type on the core reception for longterm visibility
- ✓ Laser welded segments guarantee against break off
- ✓ 10 mm segment height for superior life time
- ✓ Uniquely designed TURBO shaped segments -Pre-grinded, for best performance right from the first hole
- ✓ One outer and two inner slots enable improved cooling and increased material removal



	Ø (mm)	Reception	Working length (mm)	Total length (mm)	Article number
WCHP 52 mm 1 1/4" UNC - 1 pc	52	1 1/4" UNC	450	525	4932399707
WCHP 62 mm 1 1/4" UNC - 1 pc	62	1 1/4" UNC	450	525	4932399708
WCHP 72 mm 1 1/4" UNC - 1 pc	72	1 1/4" UNC	450	525	4932399709
WCHP 82 mm 1 1/4" UNC - 1 pc	82	1 1/4" UNC	450	525	4932399710
WCHP 92 mm 1 1/4" UNC - 1 pc	92	1 1/4" UNC	450	525	4932399711
WCHP 102 mm 1 1/4" UNC - 1 pc	102	1 1/4" UNC	450	525	4932399712
WCHP 112 mm 1 1/4" UNC - 1 pc	112	1 1/4" UNC	450	525	4932399713
WCHP 122 mm 1 1/4" UNC - 1 pc	122	1 1/4" UNC	450	525	4932399714
WCHP 132 mm 1 1/4" UNC - 1 pc	132	1 1/4" UNC	450	525	4932399715
WCHP 152 mm 1 1/4" UNC - 1 pc	152	1 1/4" UNC	450	525	4932399716
WCHP 162 mm 1 1/4" UNC - 1 pc	162	1 1/4" UNC	450	525	4932399717
WCHP 172 mm 1 1/4" UNC - 1 pc	172	1 1/4" UNC	450	525	4932352052
WCHP 182 mm 1 1/4" UNC - 1 pc	182	1 1/4" UNC	450	525	4932399718
WCHP 202 mm 1 1/4" UNC - 1 pc	202	1 1/4" UNC	450	525	4932399719
WCHP 225 mm 1 1/4" UNC - 1 pc	225	1 1/4" UNC	450	525	4932399720
WCHP 250 mm 1 1/4" UNC - 1 pc	250	1 1/4" UNC	450	525	4932399721
WCHP 300 mm 1 1/4" UNC - 1 pc	300	1 1/4" UNC	450	525	4932399722
WCHP 350 mm 1 1/4" UNC - 1 pc	350	1 1/4" UNC	450	525	4932399723

MXF DCD150

MX FUEL™ 150 MM DIAMOND CORE DRILL



EASIEST CORING ANYWHERE

152 MM CAPACITY

INCREASED PRODUCTIVITY

FEATURES

- ✓ Core with confidence by delivering AC performance with a maximum core diameter capacity of 152 mm wet & dry
- ✓ 2 speed gearing for a wide range of applications, with laser etched speed and capacity markings into the metal body
- ✓ Speed 1: up to 75 mm diameter wet & dry coring at 1600 rpm
- ✓ Speed 2: 76 to 152 mm diameter wet & dry coring 800 rpm
- ✓ Patented AUTOSTOP™ clutch provides best in class protection, preventing over rotating when losing control or in case of a stuck core
- ✓ On-board level sensor guides the user to achieve a straight and accurate finish whilst horizontal drilling
- ✓ On-board pressure gauge allows user to optimise drilling speed in order to get the best lifetime of machine and accessory
- ✓ On-board battery gauge allows the user to monitor battery capacity during entire drilling process
- ✓ Integrated water line for wet coring that is compatible with the M18™ SWITCH TANK™ interchangeable sprayer and water supply system
- ✓ 1 1/4" UNC + 1/2" G core fitting to fit most common cores, with friction plate design allowing for easy core changes
- ✓ Separately available core drill stand MXF DR255TV with 60 mm collar - 60 mm mount on the core drill fits most universal core stands
- ✓ Building on the strengths of the FUEL™ technology, MX FUEL™ system reaches new levels of cordless performance. Focused on petrol, corded and pneumatic performance, these tools deliver without the hazards associated with emissions, noise, vibration, tripping hazards and the frustrations of complex maintenance
- ✓ ONE-KEY™ tool tracking & security offers a free of charge cloud-based tracking network and inventory management platform for your tools. ONE-KEY™ also features a remote locking functionality

SPECIFICATIONS

	MXF DCD150-0C	MXF DCD150-302C	MXF DCD150-302C KIT
No load speed (rpm)	0 - 800/ 0 - 1600	0 - 800/ 0 - 1600	0 - 800/ 0 - 1600
Drilling capacity in concrete 1st/ 2nd gear (mm)	76 - 152/ 25 - 76	76 - 152/ 25 - 76	76 - 152/ 25 - 76
Tool reception	1 1/4" UNC + 1/2" G	1 1/4" UNC + 1/2" G	1 1/4" UNC + 1/2" G
Weight with battery (EPTA) (kg)	12.4 (MXF CP203)	12.4 (MXF CP203)	12.4 (MXF CP203)
Standard equipment	Trigger lock-on, side handle	Trigger lock-on, side handle	Trigger lock-on, side handle, MXF DR255TV drill stand
Includes	No batteries, no charger, box	2 x MXF CP203 batteries, MXF C charger, box	2 x MXF CP203 batteries, MXF C charger, box
Article number	4933478986	4933464887	4933471835

MXF DR255TV

PREMIUM MX FUEL™ DIAMOND DRILLING STAND FOR DIAMOND CORE DRILL

Article number 4933472247



- ✓ Height-adjustable insulated drive handle and easy to reach depth adjustment handle to facilitate one-handed operation
- ✓ Universal hinged motor clamp with 60 mm collar diameter
- ✓ Tool-free machine and watertank attachment compatible with M18™ SWITCH TANK™ 15 l water supply
- ✓ With extra long column for use with cordless MXF DCD150 diamond drilling tool, for drilling holes up to ø250 mm
- ✓ Can be used with vacuum pump on smooth and even surfaces
- ✓ Drill angle indication on base plate, can be variably tilted from 0° to 45°
- ✓ Adjustable sliding blocks
- ✓ Lightweight and durable aluminium design
- ✓ Concrete drop anchor fixing set (4932399731) included

VACUUM PUMP VP6

Article number 4932352094


- ✓ Vacuum pump VP6 for fastening of the diamond drill rig on smooth and even surfaces. Suction capacity: 850 mbar. Max. vacuum pressure: 6 m³/h/ 100 l/min. Rated voltage: 220-240 V. Supplied with 5 m hose with DW7 connection



FIXING KIT

Article number 4932399731

- ✓ Fixing kit for exclusive use in concrete. ø16 mm drill bit is required to set the drop anchor. Kit includes stud bolt, setting tool, wing nut, washer and 5 pcs of M12 drop anchor



VACUUM SEAL

Article number 4931400613

- ✓ Replacement seal for the drilling rig. To vacuum fix the rig on the ground/wall



WT 10 WATERTANK

Article number 4932399726

- ✓ Watertank WT 10. 10 liters capacity, steel water tank with inside and outside polyester coating. Reliable brass pump with a max. pressure bar of 6 bar. 2.5 m hose with quick connection system fits direct to MILWAUKEE® diamond drills



WATER COLLECTION RING MAX. Ø 180 MM

Article number 4932399727

- ✓ Watertank WT 10. 10 liters capacity, steel water tank with inside and outside polyester coating. Reliable brass pump with a max. pressure bar of 6 bar. 2.5 m hose with quick connection system fits direct to MILWAUKEE® diamond drills



MX FUEL™ THIN KERF WET DIAMOND DRILLING CORES

- ✓ Standard 1/2" G reception up to 45 mm, standard 1 1/4" UNC reception from 46 mm to 150 mm
- ✓ Laser welded segments guarantee against break off
- ✓ 10 mm segment height for superior life time
- ✓ For wet drilling
- ✓ Suitable for reinforced concrete



Model	Ø (mm)	Reception	Working lenght (mm)	Total length (mm)	Article number
WCHP-TK 12 mm	12	1/2" G	200	270	4932472167
WCHP-TK 14 mm	14	1/2" G	300	370	4932472168
WCHP-TK 16 mm	16	1/2" G	300	370	4932472169
WCHP-TK 18 mm	18	1/2" G	300	370	4932472170
WCHP-TK 20 mm	20	1/2" G	300	370	4932472171
WCHP-TK 22 mm	22	1/2" G	300	370	4932472172
WCHP-TK 24 mm	24	1/2" G	300	370	4932472173
WCHP-TK 25 mm	25	1/2" G	300	370	4932472174
WCHP-TK 28 mm	28	1/2" G	300	370	4932472175
WCHP-TK 30 mm	30	1/2" G	300	370	4932472176
WCHP-TK 32 mm	32	1/2" G	300	370	4932472177
WCHP-TK 35 mm	35	1/2" G	300	370	4932472178
WCHP-TK 40 mm	40	1/2" G	300	370	4932472180
WCHP-TK 46 mm	46	1 1/4" UNC	450	525	4932478953
WCHP-TK 51 mm	51	1 1/4" UNC	450	525	4932472184
WCHP-TK 56 mm	56	1 1/4" UNC	450	525	4932472185
WCHP-TK 61 mm	61	1 1/4" UNC	450	525	4932472186
WCHP-TK 66 mm	66	1 1/4" UNC	450	525	4932472187
WCHP-TK 68 mm	68	1 1/4" UNC	450	525	4932478954
WCHP-TK 71 mm	71	1 1/4" UNC	450	525	4932472188
WCHP-TK 76 mm	76	1 1/4" UNC	450	525	4932472189
WCHP-TK 81 mm	81	1 1/4" UNC	450	525	4932472190
WCHP-TK 86 mm	86	1 1/4" UNC	450	525	4932472191
WCHP-TK 91 mm	91	1 1/4" UNC	450	525	4932472192
WCHP-TK 101 mm	101	1 1/4" UNC	450	525	4932472193
WCHP-TK 105 mm	105	1 1/4" UNC	450	525	4932472194
WCHP-TK 111 mm	111	1 1/4" UNC	450	525	4932472195
WCHP-TK 121 mm	121	1 1/4" UNC	450	525	4932472196
WCHP-TK 126 mm	126	1 1/4" UNC	450	525	4932478955
WCHP-TK 130 mm	130	1 1/4" UNC	450	525	4932472197
WCHP-TK 140 mm	140	1 1/4" UNC	450	525	4932472198
WCHP-TK 150 mm	150	1 1/4" UNC	450	525	4932472199

DRILLING SHROUD PHDE152

Article number 4932471990

- ✓ Drilling shroud for drilling and dry coring from Ø 25 - 152 mm. Brush insert to improve suction and extraction



MXF COS350

MX FUEL™ 350 MM CUT-OFF SAW



FASTEST CUTS FROM
START TO FINISH

350 MM CUT
CAPACITY

NO GAS HEADACHES

FEATURES

- ✓ The world's first 350 mm battery powered cut-off saw to deliver the power to cut reinforced concrete with a full 350 mm cut capacity
- ✓ Quieter than other petrol equivalent saws, with a low engine vibration and well-balanced weight
- ✓ Keyless adjustable blade guard & on-board water line for wet cutting which is compatible with the M18™ SWITCH TANK™ interchangeable sprayer and water supply system
- ✓ Separately available cut-off saw cart MXF COSC to maintain straight cuts
- ✓ Supplied with HUDD 350 mm diamond blade (4932471985), contractor bag for batteries and charger
- ✓ Building on the strengths of the FUEL™ technology, MX FUEL™ system reaches new levels of cordless performance. Focused on petrol, corded and pneumatic performance, these tools deliver without the hazards associated with emissions, noise, vibration, tripping hazards and the frustrations of complex maintenance
- ✓ ONE-KEY™ tool tracking & security offers a free of charge cloud-based tracking network and inventory management platform for your tools. ONE-KEY™ also features a remote locking functionality

SPECIFICATIONS

	MXF COS350-0	MXF COS350-602
No load speed (rpm)	5370	5370
Blade diameter (mm)	350	350
Bore size (mm)	20/ 25.4	20/ 25.4
Max. cutting depth (mm)	125	125
Weight with battery (EPTA) (kg)	16.7 (MXF XC406)	16.7 (MXF XC406)
Includes	No batteries, no charger, no kitbox	2 x MXF XC406 batteries, MXF C charger, no kitbox
Article number	4933478984	4933464881

MXF COSC

MX FUEL™ CUT-OFF SAW CART

Article number 4933464883



- ✓ Light weight 350 mm cut-off saw cart to maintain straight cuts with full 125 mm depth of cut capacity
- ✓ Height-adjustable drive handle and easy to reach depth adjustment handle to facilitate one-handed operation
- ✓ Tool-free machine and water tank attachment compatible with the M18™ SWITCH TANK™ interchangeable sprayer and water supply system
- ✓ Full mobility with on-board spare battery storage
- ✓ Easily collapsible for transport and storage
- ✓ Supplied with 11.4 l gravity feed tank

M18 BPFPH-0

M18™ SWITCH TANK™ POWER BASE

Article number 4933464961

- ✓ The M18™ SWITCH TANK™ 15 l backpack fluid pump sprayer delivers the industry's first interchangeable tank design with no manual pumping
- ✓ The interchangeable tank design isolates the pump, hose and wand, separating wearable components from the M18™ SWITCH TANK™ powered base
- ✓ Add on and replace tank assemblies to eliminate cross-chemical contamination and lower cost of ownership
- ✓ 120 PSI (8.27 Bar) pump pressure
- ✓ Features adjustable pressure selection dial to best suit user requirements



REDLITHIUM™

M18 BFPF-WST

M18™ SWITCH TANK™ 15 L WATER SUPPLY

Article number 4933464965

- ✓ Fully compatible with SWITCH TANK™
- ✓ Water sprayer tank for efficient water delivery for concrete cutting and coring applications. Also useful for washing up slurry's, areas and equipment
- ✓ Semi-transparent tank with measuring scale to know how much liquid is inside the tank



SPEEDCROSS ADD

- ✓ ADD is most suitable for asphalt
- ✓ Double tensioned core for an improved durability and better stability whilst cutting
- ✓ Angled, special wear-retardant segments to avoid a segment tear-off



Type	Disc diameter (mm)	Bore size (mm)	Segment height (mm)	Cutting width (mm)	Article number
ADD 350 mm	350	25.4	10	2.8	4932478952

SPEEDCROSS

- ✓ Maximum Speed, Long Life, Low Vibration
- ✓ Universal blade for a variety of materials
- ✓ Classed into two categories for maximum lifetime
- ✓ 10 mm segments height to ensure long lifetime
- ✓ Laser welded segments for best performance
- ✓ Low vibration



SPEEDCROSS HUDD



Type	Disc diameter (mm)	Bore size (mm)	Segment height (mm)	Cutting width (mm)	Article number
HUDD 350	350	25.4	8	2.6	4932471985

DUH DIAMOND BLADES



- ✓ A trade laser welded quality blade with exceptional performance in hard materials such as hard concrete, block paviors and masonry products

Type	Disc diameter (mm)	Bore size (mm)	Segment height (mm)	Cutting width (mm)	Article number
DUH 350	350	25.4	10	2.8	4932471986

SPEEDCROSS STEELHEAD™ DIAMOND BLADES



- ✓ STEELHEAD™ is most suitable for steel and stainless steel. Also suitable for heavily reinforced concrete
- ✓ High density of special brazed diamonds ensure a very aggressive cutting progress

Type	Disc diameter (mm)	Bore size (mm)	Segment height (mm)	Cutting width (mm)	Article number
STEELHEAD™ 350	350	25.4	4	2.8	4932471988

PRO+ METAL CUTTING DISC



- ✓ Suitable for acid-resistant steel, hardox, high-alloy steel, mild and tool steel. Not suitable for stainless steel
- ✓ Applications: Iron and sulphur free thin cut-off wheels for steel

Type	Disc diameter (mm)	Thickness (mm)	Bore size (mm)	Article number
SCS 41 / 350	350	4	25.4	4932471989

DUCTILE & STONE CUTTING DISC



- ✓ Applications: Ductile iron, non-ferrous metals & stone

Type	Disc diameter (mm)	Thickness (mm)	Bore size (mm)	Article number
CCS 41 / 350	350	4	25.4	4932472264



MXF DH2528H

MX FUEL™ 25 KG CLASS 28 MM HEX DEMOLITION HAMMER



**MOST PRODUCTIVE,
LOWEST VIBRATION**

**FASTER, SAFER,
EASIER, DEMOLITION**

LIGHTEST WEIGHT

FEATURES

- ✓ The industry's first cordless 28 mm Hex demolition hammer, delivering the power of petrol, corded and pneumatic
- ✓ Heavy Duty hammer provides 64 blow Joules of impact energy for toughest demolition applications
- ✓ Floating body anti-vibration technologies allows the user to work all day without reaching dangerous exposure levels
- ✓ Low 5.17 m/s² vibrations for over 7 hrs (HAVS) non-stop productivity
- ✓ Fast material removal at 1300 BPM, providing maximum productivity in all applications
- ✓ Breaks up to 2 tons of concrete or a 12 m (20 cm deep and 30 cm wide) trench on 1 x MXF XC406 battery
- ✓ AC-equivalent tool life and service friendly with an integrated service indicator light alerting the user every 40 hours to add grease
- ✓ Building on the strengths of the FUEL™ technology, MX FUEL™ system reaches new levels of cordless performance.
- ✓ ONE-KEY™ tool tracking & security offers a free of charge cloud-based tracking network and inventory management platform for your tools. ONE-KEY™ also features a remote locking functionality
- ✓ Supplied with 1 x 28 mm Hex pointed chisel (4932459774), 1 x 28 mm Hex 35 mm flat chisel (4932459775)

SPECIFICATIONS

	MXF DH2528H-0	MXF DH2528H-602
Tool reception	28 mm K-Hex	28 mm K-Hex
Blow energy (EPTA) (J)	64	64
Full load hammer action (BPM)	1300	1300
Vibration chiselling (m/s ²)	5.17	5.17
Weight with battery (EPTA) (kg)	29.6 (MXF XC406)	29.6 (MXF XC406)
Includes	No battery, no charger, no kitbox	2 x MXF XC406 batteries, MXF C charger, no kitbox
Article number	4933478985	4933464877



**FLOATING
BODY**



MXF DHT

BREAKER TROLLEY FOR MX FUEL™ DEMOLITION HAMMER

Article number 4933464879

- ✓ Lightweight demolition hammer cart with large rubber wheels for easy transport across uneven terrain
- ✓ Integrated demolition hammer retention strap and full-metal fastening locations
- ✓ On-board spring-loaded storage locations for 4 chisels
- ✓ Battery & charger storage dock with charger cable hook for transport



AS 30 MAC

30 L M-CLASS DUST EXTRACTOR

Article number 4933459415

- ✓ Compact 30 litre tank for site/workshop use
- ✓ 4500 litres/min airflow with 250 mbar suction
- ✓ Dust class M. Standard MAK-factor > 0.1 mg/m³: mineral dust, wood dust (oak, beech)
- ✓ Power take off for auto switching of power tools



AS 42 MAC

42 L M-CLASS DUST EXTRACTOR

Article number 4933459418

- ✓ Compact 42 litre tank for site/workshop use
- ✓ 4500 litres/min airflow with 250 mbar suction
- ✓ Dust class M. Standard MAK-factor > 0.1 mg/m³: mineral dust, wood dust (oak, beech)
- ✓ Power take off for auto switching of power tools
- ✓ Durable PTFE filter with high filtration efficiency and washable non-stick membrane



28 MM HEX CHISELS



	Description	Total length (mm)	Blade width (mm)	Article number
1.	28 mm Hex pointed chisel	400	-	4932459774
2.	28 mm Hex flat chisel	400	35	4932459775
3.	28 mm Hex flat chisel	400	80	4932459776
4.	28 mm Hex spade chisel	400	125	4932479221
5.	28 mm Hex asphalt cutter	440	115	4932479222
6.	28 mm Hex toolholder	390	-	4932479223
7.	28 mm tamping plate	200	200	4932479224

BREAKER BOOT

Article number 4932471992

- ✓ Universal fit - Fits most 28 & 30 mm breaking hammers. Perfect match to 28 mm MX FUEL™ breaker.
- ✓ Universal fit to pointed and flat chisels
- ✓ Slim design for reaching tight areas
- ✓ Hose clip adapter for easy attachment to MILWAUKEE® vacuum cleaners





MXF LSDP

MX FUEL™ LARGE SEWER DRUM MACHINE WITH POWERTREDZ™



REDLITHIUM™

POWERTREDZ™ LIFT ASSIST

MESS CONTAINED

POWER TO CLEAR ROOTS AT 60 M

FEATURES

- ✓ The MX FUEL™ large sewer drum machine with integrated POWERTREDZ™ assists one-person only to move the sewer machine in and out of the service van, up and down building stairs
- ✓ World's first battery powered large drum machine that uses MILWAUKEE® 16 mm and 20 mm inner core spirals in drains from 75 mm up to 200 mm, with the power to clear roots up to 60 m down the line
- ✓ Fully enclosed drum eliminates free spinning parts, providing the user with more protection whilst working in and around fragile fixtures as well as better mess containment whilst unclogging drains
- ✓ Electronic foot pedal with non-slip grip and an integrated drum brake electronically slows the drum very fast for maximum end user control and safety
- ✓ MX FUEL™ drum capacity for 16 mm x 30 m long and 20 mm x 30 m long drain cleaning cables
- ✓ ONE-KEY™ tool tracking & security offers a free of charge cloud-based tracking network and inventory management platform for your tools. ONE-KEY™ also features a remote locking functionality

SPECIFICATIONS

	MXF LSDP-301
No load speed (rpm)	200
Drain capacity (mm)	75 - 200
Spiral diameter (mm)	20
Spiral length (m)	23
Weight with battery (EPTA) (kg)	56.6 (MXF CP203)
Standard equipments	1 x 20 mm x 15,2 mm inner core cable 1 x 20 mm x 7,6 mm inner core cable, 1 x 9 pc head attachment kit
Includes	1 x MXF CP203 battery, MXF C charger, no kitbox
Article number	4933471851



POWERTREDZ™



ACCESSORIES - MXF LSDP

	Description	Compatible with model	MXF LSDP	Article number	
Inner core SD	16 mm x 7,6 m Inner core	✓		4932471701	
	16 mm x 15,2 m Inner core	✓		4932471702	
	20 mm x 7,6 m Inner core	✓		4932471703	
	20 mm x 15,2 m Inner core	✓		4932471704	
	16 mm Anchor cable	✓		4932471707	
	16 mm x 60 cm Anchor cable	✓		4932471708	
	20 mm x 600 mm Anchor cable	✓		4932471709	
Straight auger SD	Medium funnel auger for 10, 13, 16 mm cables	✓		48532830	
Funnel auger SD	Funnel auger for 16, 20 mm cables	✓		48532831	
Root cutter SD	75 mm root cutter for 16 & 20 mm cables	✓		48532832	
	100 mm root cutter for 16 & 20 mm cables	✓		48532833	
	150 mm root cutter for 16 & 20 mm cables	✓		48532834	
Opening tool SD	Small opening tool for 16, 20 mm cables	✓		48532835	
	Medium opening tool for 16, 20 mm cables	✓		48532836	
Chain knocker SD	75 mm chain knocker for 16, 20 mm cables	✓		48532837	
	100 mm chain knocker for 16, 20 mm cables	✓		48532838	
Head kit SD	9 pc head kit 16, 20 mm cables	✓		48532840	
Guide hose for model MXF LSDP	Guide hose for model MXF LSDP	✓		4932478110	
Pin key	Pin key for all cables	✓		4932471717	

MXF PTR2

MX FUEL™ PIPE THREADING MACHINE 2" WITH ONE-KEY™

FEATURES

- ✓ Threading capacity from 1/8" all the way up to 2"
- ✓ One stop shop: Cut, Ream and Thread with one tool
- ✓ Maximum mobility thanks to foldable wheel cart with tool free setup
- ✓ Unique vertical storage capability minimises used space during transportation or in the warehouse
- ✓ High versatility through front and backside fully featured hammer chucks that allow use of grooving attachments on the back of the machine
- ✓ All day long run time with up to 140 cycles (Cut+Ream+Thread) on one MX FUEL™ 6.0 Ah battery
- ✓ Integrated auto oil system with oil pump and reservoir
- ✓ Outstanding performance with 2 speed settings of 39 RPM and 59 RPM matching corded speed
- ✓ Threading capacity from 1/8" all the way up to 2"
- ✓ ONE-KEY™ tool tracking & security offers a free of charge cloud-based tracking network and inventory management platform for your tools. ONE-KEY™ also features a remote locking functionality
- ✓ Building on the strengths of the FUEL™ technology, MX FUEL™ system reaches new levels of cordless performance. Focused on petrol, corded and pneumatic performance, these tools deliver without the hazards associated with emissions, noise, vibration, tripping hazards and the frustrations of complex maintenance



MAXIMUM MOBILITY

FAST SET UP

UP TO 140 3/4" CYCLES ON ONE MX FUEL™ 6.0 AH BATTERY CHARGE

SPECIFICATIONS

	MXF PTR2-601
Speed settings	2
No load speed (rpm)	0 - 39/ 0 - 59
Thread size (inch)	1/8"-2"
Standard equipment	1/2"-3/4" BSPT HS die set, 1"-2" BSPT HS die set
Weight with battery (EPTA) (kg)	115 (MXF XC406)
Includes	1 x MXF XC406 battery, MXF C charger, no kitbox
Article number	4933492100

PIPE THREADER DIES

NEW

Description	Type	Thread size (inch)	Article number
PTR2D 1/2" - 3/4"	NPT	1/2" - 3/4"	48361205
PTR2D 1" - 2" NPT HSS	NPT HSS	1 - 2	48361206
PTR2D 1/2" - 3/4" BSPT 4	BSPT Alloy	1/2" - 3/4"	4932492924
PTR2D 1" - 2" BSPT Alloy	BSPT Alloy	1 - 2	4932492925
PTR2D 1/2" - 3/4" BSPT HS	BSPT HS	1/2" - 3/4"	4932492926
PTR2D 1" - 2" BSPT HS	BSPT HS	1 - 2	4932492927
PTR2D 1/2" - 3/4" BSPT	BSPT HSS	1/2" - 3/4"	4932492928
PTR2D 1" - 2" BSPT HSS	BSPT HSS	1 - 2	4932492929

REDLITHIUM™

PTR2 DH NPT

NPT DIE HEAD FOR MX FUEL™ STATUIONARY 2" PIPE THREADER

Article number 49165100



PTR2 DH BSPT

BSPT DIE HEAD FOR MX FUEL™ STATUIONARY 2" PIPE THREADER

Article number 49165103



PTR2 CW

PIPE CUTTER WHEEL FOR MX FUEL™ STATUIONARY 2" PIPE THREADER

Article number 48361401



PTR2 RC

REAMER CONE THREADING MACHINE FOR MX FUEL™ STATUIONARY 2" PIPE THREADER

Article number 49165105



MXF TL

MX FUEL™ TOWER LIGHT

ONE-KEY™
UNLOCKING THE DIGITAL JOBSITE™



REDLITHIUM™



MOST PORTABLE 3 M LIGHT, INSIDE/OUTSIDE

27000 LUMENS, TASK OR AREA

WITHSTANDS THE STORM

FEATURES

- ✓ TRUEVIEW™ high definition light output with up to 27000 lumens in AC and up to 20000 lumens in DC mode for both task and area lighting
- ✓ Has the ability to manoeuvre the light heads in multiple orientations, allowing the user to direct light to wherever it's needed
- ✓ Low weight of 48 kg with the two big all-terrain wheels, this tower light is easy to transport across wet and uneven job site terrains with minimum effort
- ✓ Due to the motorised mast, the tower light is capable to be set up in less than 10 sec. The mast is extendable up to 3.10 meter and can withstand up to 55 km/h of wind
- ✓ To withstand the toughest conditions on the toughest job sites, the MX FUEL™ Tower Light is built with a durable, high impact polycarbonate lenses that delivers superior impact durability
- ✓ A sealed battery box ensures batteries are kept protected from the elements at all times
- ✓ ONE-KEY™ tool tracking & security offers a free of charge cloud-based tracking network and inventory management platform for your tools. ONE-KEY™ also features a remote locking functionality. Customisation function allows for precise tool adjustment to application
- ✓ The built-in MX FUEL™ charger gives you the freedom to charge any MX FUEL™ battery in the AC mode
- ✓ IP 55 rating

SPECIFICATIONS

	MXF TL-601
System	MX FUEL™
Battery compatibility	All MX FUEL™ batteries
Light	LED
Max. AC light output high/medium/low/strobe (lumens)	27,000/ 14,000/ 7000/ -
Max. DC light output high/medium/low/strobe (lumens)	20,000/ 10,000/ 5000/ -
Max. Run time AC mode (h)	Endless
Max. Run time with MXF XC406 (h)	3/ 6/ 10
Max. Mast height (m)	3.1
Weight with battery (EPTA) (kg)	53 (MXF XC406)
Includes	1 x MXF XC406 battery, integrated charger, No kitbox
Article number	4933471844



REDLITHIUM USB

**ONE SYSTEM,
OVER 15 TOOLS**

M12

**ONE SYSTEM,
OVER 110 TOOLS**

M18

**ONE SYSTEM,
OVER 255 TOOLS**

MX FUEL

**ONE SYSTEM,
OVER 15 TOOLS**

MILWAUKEE® IS THE SOLUTIONS PROVIDER

ACCESSORIES

**OVER
3000
SOLUTIONS**

HANDTOOLS

**OVER
1000
SOLUTIONS**

STORAGE

**OVER
100
POSSIBLE
COMBINATIONS**

PPE

**OVER
500
SOLUTIONS**



UNLOCKING THE DIGITAL JOBSITE.™



ONE-KEY™ is a digital platform for tools and equipment, built to help jobs run smoother.

Track, manage and secure your equipment from any smart mobile device or computer using the industry's largest Bluetooth® community tracking network. If ever lost or stolen, prevent tampering with remote lockout capability.

Learn more at milwaukeekeetool.ee/one-key

**ALL MX FUEL™
TOOLS, SUPER
CHARGER,
XC AND HD
BATTERY
PACKS HAVE
ONE-KEY™
INTEGRATED
TECHNOLOGY**



TRACK



MANAGE



CUSTOMISE
(TOWER LIGHT ONLY)



**DOWNLOAD THE FREE ONE-KEY™ APP VIA
THE APP STORE OR GOOGLE PLAY STORE.**



PLEASE SEE OUR POWERTOOLS AND ACCESSORIES CATALOGUES FOR MORE INFO,
OR GO ONLINE AT **MILWAUKEETOOL.EE**

Distributed by:

**Techtronic Industries Nordic
Aps**

Stamholmen 147, 1.,
2650 Hvidovre, Tanska
Puh. +358 800 1 09000
milwaukeekeetool.ee

